



Indoor and outdoor LED floodlight specifically designed for PADEL application. Die-cast aluminum body painted with anti-corrosion thermosetting powder, resistant to salt spray, silver color. Stainless steel screws.

# **OPTICS FOR PADEL:**


PMMA lenses with high flux efficiency, specifically designed for PADEL fields: very high uniformity, zero glare, excellent visual comfort.







(LED) | C € | 220 V≈ ⊕ | -25°C | IP66 | IK08 | RG0 | CRI >80 | ⊕ 3 step | <7% | LOW | L80-B20 | L80-B50 | ↑ 7 YEARS | ⊕ MacAdam | <7% | flicker | >50,000h | >70,000h | ↑ WARRENTY

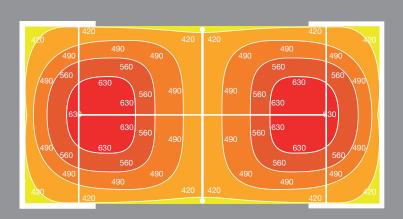


### **INDOOR**

Standard field - CONI / FIT regulations:

0,7 Uniformity (E-min/E-med)

# Products used:

175W - 4000K - CRI>80



Lux	Uniformity	Power	Tilt	
539	0.73	1.400 KW	0°	

### **OUTDOOR**


Standard field - CONI / FIT regulations:

Activity level: 2

0,7 Uniformity (E-min/E-med)

# **Products used:**

8 pcs - 7038PD4190GL 190W - 4000K - CRI>80

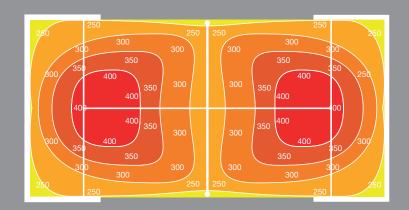

Lux	Uniformity	Power	Tilt						
506	0.70	1,520 KW	0°	150	200	250	300	350	400